





## Models 19 and 89

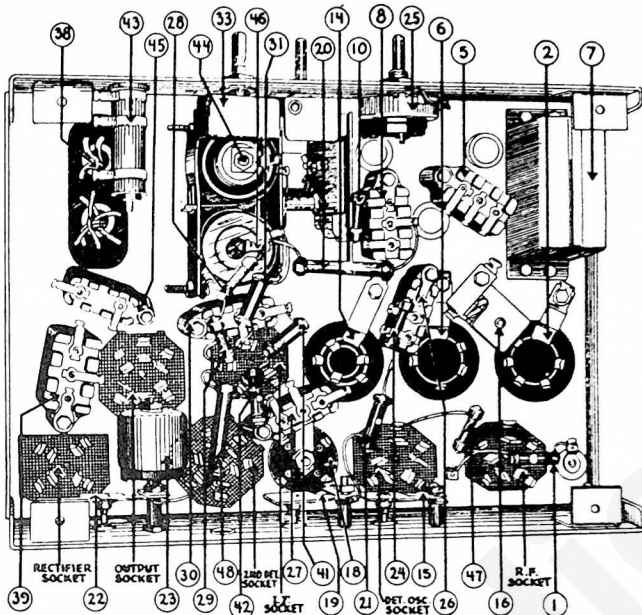

Bottom View of Chassis, Showing Parts

### Replacement Parts for Models 19 (Code 121-2-3) and 89

	Part No.		Part No.
① Resistor (10,000 Ohms) Brown—Black—Orange	4412	② Resistor (70,000 Ohms) Violet—Black—Orange	5385
② Antenna Transformer	06619	③ Condenser (.01 Mfd.)	3903-T
③ Tuning Condenser Assembly	06577	④ Resistor (490,000 Ohms) Yellow—White—Yellow	4517
④ Compensating Condenser—(R.F. Part of Tuning Condenser Assembly)		⑤ Bezel	8055
⑤ Condenser and Resistor—(.09 Mfd. and 200Ω)	4989-W	⑥ Tone Control	06764
⑥ Interstage Transformer	06662	⑦ Output Transformer	2580
⑦ Filter Cond. Bank (.09—.09—.05—.05—.25)	06624	⑧ Voice Coil and Cone Assembly	02823
⑧ Condenser (Double—.09 and .0007 Mfd.)	8174-B	⑨ Speaker Field and Bucking Coil Assembled with Pot (K-7)	02761
⑨ Compensating Condenser—(R.F. Part of Tuning Condenser Assembly)		⑩ Switch (A.C.) Part of Vol. Control Assembly	
⑩ Resistor (15,000 Ohms) Brown—Green—Orange	6208	⑪ Power Transformer (50-60 Cycles, 115 Volts)	8046
⑪ Pilot Lamp	6608	⑫ Power Transformer (25-40 Cycles—115 Volts)	8047
⑫ Dial Scale	7882	⑬ Power Transformer (50-60 Cycles—230 Volts)	8048
⑬ Pilot Lamp—(Shadow Tuning)	6608	⑭ Condenser (Double—.015 and .015 Mfd.)	3793-E
⑭ Oscillator Transformer	06620	⑮ Shadow Tuning	6497-G
⑮ Compensating Condenser — (1st I.F. Primary)	04000-M	⑯ Resistor (99,000 Ohms) White—White—Orange	4411
⑯ Compensating Condenser — (Low Frequency)	04000-S	⑰ Resistor (1,000,000 Ohms) Brown—Black—Green	4409
⑰ Compensating Condenser—(R.F. Part of Tuning Condenser Assembly)		⑱ B.C. Resistor (235 Ohms and 32 Ohms—Wire Wound)	7998
⑱ First I.F. Transformer	00621	⑲ Electrolytic Condenser—6 Mfd.	8165
⑲ Compensating Condenser (1st I.F. Secondary)	04000-M	⑳ Condenser (.05 Mfd.)	3615-E
⑳ Resistor (5,000 Ohms) Green—Black—Red	3526	㉑ Electrolytic Condenser—6 Mfd.	8166
㉑ Resistor (2,000,000 Ohms) Red—Black—Green	5872	㉒ Resistor (51,000 Ohms) Green—Brown—Orange	4518
㉒ Compensating Cond. (2nd I.F. Primary)	04000-A	㉓ Resistor (32,000 Ohms) Orange—Red—Orange	3525
㉓ Second I.F. Transformer	06622	㉔ Tube Shield	9006
㉔ Resistor (51,000 Ohms) Green—Brown—Orange	6098	㉕ Knob (Large)	03063
㉕ Volume Control and A.C. Switch	8003	㉖ Knob (Small)	03064
㉖ Condenser (Double—.00011 & .00011 Mfd.)	8035-C	㉗ Knob Spring	5262
㉗ Condenser (.01 Mfd.)	3903-AB	㉘ Grid Clip	4897
㉘ Resistor (70,000 Ohms) Violet—Black—Orange	5385	㉙ Four Prong Socket	7544
		㉚ Five Prong Socket	7546
		㉛ Six Prong Socket	7547
		㉜ Pilot Lamp Shield	5780