



# MODEL 66

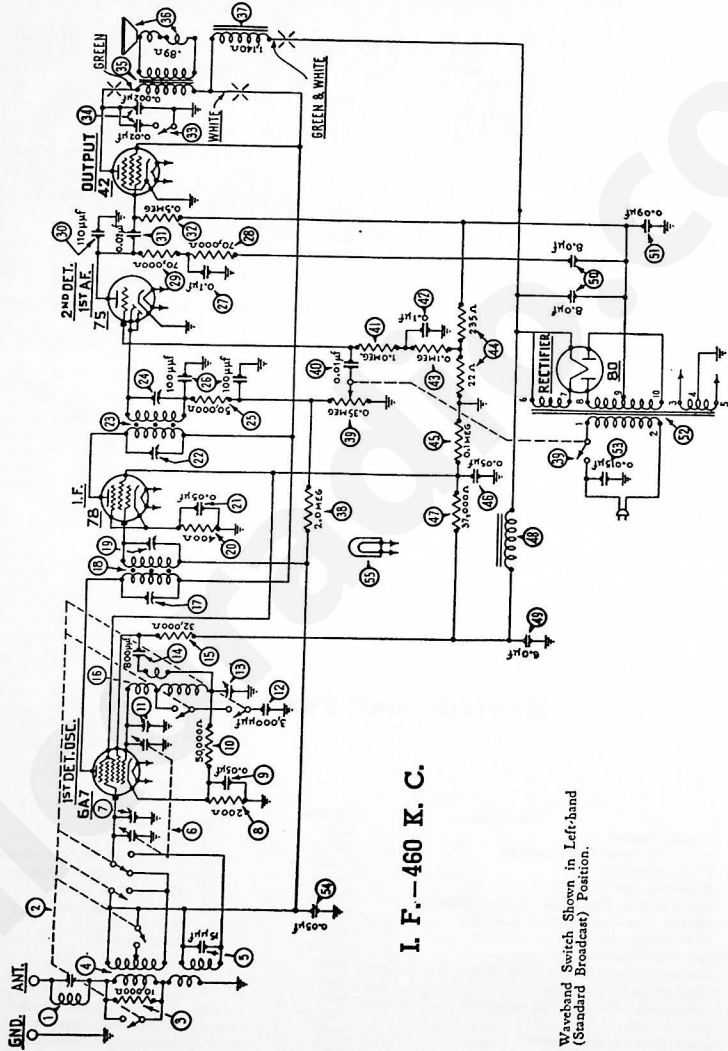

I. F. - 460 K. C.

Waveband Switch Shown in Left-band (Standard Broadcast) Position.

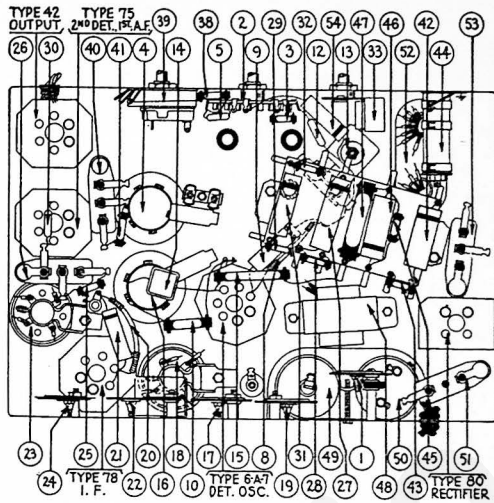

## Replacement Parts for Model 66

No. on Figs.	Description	Part No.	No. on Figs.	Description	Part No.
①	Wave Trap.....	38-5199	④⑤	Output Transformer.....	32-7019
②	Wave-band Switch.....	42-1066	⑥⑥	Voice Coil & Cone Assembly (S-12).....	36-3014
③	Resistor (10,000 ohms) (Brown-Black-Orange).....	33-1000	⑦⑦	Field Coil and Pot. Assembly (S-12).....	36-3341
④	Antenna Transformer.....	32-1412	⑧⑧	Resistor (2 Megohms) (Red-Black-Green).....	33-1025
⑤	Condenser (.000015 Mfd.).....	30-1030	⑨⑨	Volume Control and On-Off Switch.....	33-5006
⑥	Tuning Condenser Assembly.....	31-1231	⑩⑩	Condenser (.01 Mfd.) (Bakelite Block).....	3903-AB
⑦	Compensating Condenser (ANT).....	Part of ⑧	⑪⑪	Resistor (1 Megohm) (Brown-Black-Green).....	33-1096
⑧	Resistor (200 ohms Flexible) (Red-Black-Brown).....	7217	⑫⑫	Condenser (.1 Mfd.).....	30-4122
⑨	Condenser (.05 Mfd. Tubular).....	30-4020	⑬⑬	Resistor (1 Meg.) (White-White-Orange).....	6099
⑩	Resistor (50,000 ohms) (Green-Green-Orange).....	6098	⑭⑭	Resistor (B. C. Wire-wound) (22, 235 ohms).....	33-3037
⑪	Compensating Condenser (OSC. HF).....	Part of ⑧	⑮⑮	Resistor (1 Meg.) (White-White-Orange).....	6099
⑫	Condenser (.003 Mfd. Mica).....	30-1022	⑯⑯	Condenser (.05 Mfd. Tubular).....	30-4123
⑬	Compensating Condenser (Osc. I. F.).....	04000-S	⑰⑰	Resistor (37,000 ohms) (Orange-Violet-Orange).....	33-1098
⑭	Condenser (.0008 Mfd. Mica).....	5878	⑱⑱	Filter Choke.....	32-7018
⑮	Resistor (32,000 ohms) (Orange-Red-Orange).....	5279	⑳⑳	Condenser (Electrolytic—6 Mfd.).....	30-2021
⑯	Oscillator Transformer.....	32-1413	㉑㉑	Condenser (Electrolytic—8-8 Mfd.).....	30-2028
⑰	Compensating Condenser (1st I. F. Pri.).....	04000M	㉒㉒	Condenser (.09 Mfd. Bakelite Block).....	4989-D
⑱	1st I. F. Transformer.....	32-1414	㉓㉓	Power Transformer.....	8046
⑲	Compensating Condenser (1st I. F. Secondary).....	04000M	㉔㉔	Condenser (.015 Mfd. Bakelite Block).....	3793-W
㉑	Resistor (400 ohms Flexible).....	33-3016	㉕㉕	Condenser (.05 Mfd. Tubular).....	30-4020
㉒	Condenser (.05 Mfd. Tubular).....	30-4020	㉖㉖	Dial Light.....	6608
㉓	Compensating Condenser (2d I. F. Primary).....	04000M	㉗㉗	Four Prong Socket.....	7544
㉔	2d I. F. Transformer.....	32-1415	㉘㉘	Six Prong Socket.....	7547
㉕	Compensating Condenser (2d I. F. Secondary).....	04000J	㉙㉙	Seven Prong Socket.....	27-9005
㉖	Resistor (50,000 ohms) (Green-Brown-Orange).....	6098	㉚㉚	Tube Shield.....	28-1107
㉗	Condenser (.0001 Mfd. Twin Bakelite Block).....	8035-B	㉛㉛	Chassis Mounting Screw.....	W-567
㉘	Condenser (.1 Mfd. Tubular).....	30-4170	㉜㉜	Chassis Mounting Washer (Metal).....	W-315
㉙	Resistor (70,000 ohms) (Violet-Black-Orange).....	33-1115	㉝㉝	Chassis Mounting Washer (Rubber).....	5189
㉚	Resistor (70,000 ohms) (Violet-Black-Orange).....	33-1115	㉞㉞	Knob (Large).....	27-4061
㉛	Condenser (.00011 Mfd. Mica).....	30-1006	㉟㉟	Knob (Small).....	27-4052
㉜	Condenser (.02 Mfd. Tubular).....	30-4113	㊱㊱	Dial Assembly.....	31-1234
㉝	Resistor (500,000 ohms) (Yellow-White-Yellow).....	6097	㊲㊲	Dial Scale.....	27-5057
㉞	Tone Control.....	30-4192	㊳㊳	A. C. Cord and Plug Assembly.....	L-943A
㉟	Condensers in Tone Control.....	Inside ㉞			