


MODELS S-1626 and G-1628


I.F. = 470KC

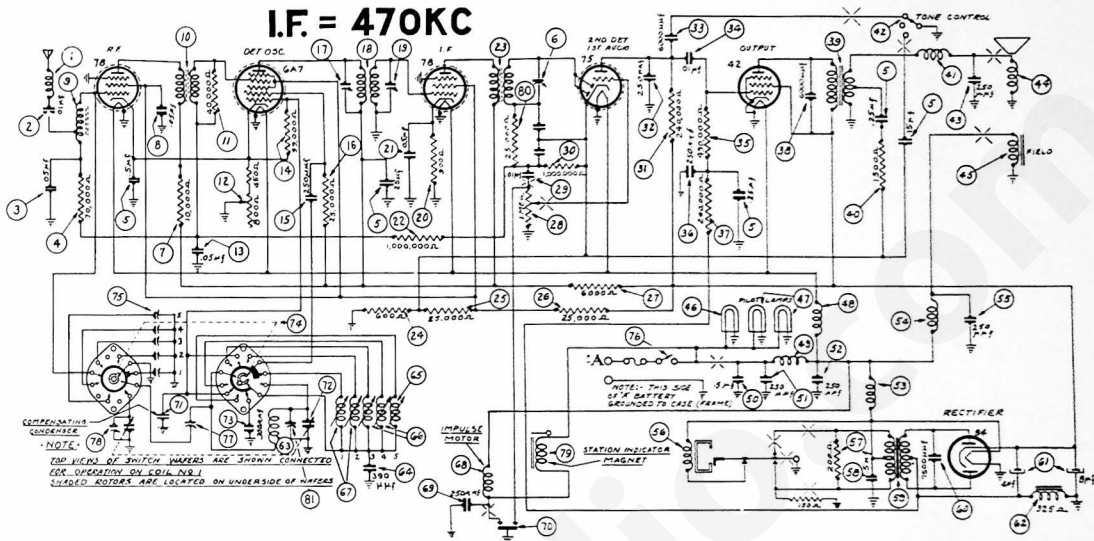

Aligning Procedure will be found on page 172.

PARTS LIST

No.	Description	Part No.	No.	Description	Part No.
1	Antenna Choke	32-1956	41	Cone and Voice Coil	91-0041
2	Condenser (.01 mfd.)	61-0014	42	Pilot Lamp	Not Replaceable
3	Condenser (.05 mfd.)	30-4569	43	Pilot Lamp	34-2039
4	Resistor (70,000 ohms)	33-370337	44	Filament Choke	32-1604
5	Condenser (.15-.25-.25-.25 mfd.)	61-0017	45	"A" Choke	32-1644
6	Padder (Sec. 2nd I. F. Trans.)	33-339134	46	Condenser (.5 mfd.)	30-4474
7	Resistor (10,000 ohms)	33-310337	47	Condenser (250 mmfd.)	30-1032
8	Condenser (.05 mfd.)	30-4444	48	Condenser (250 mmfd.)	30-1032
9	Antenna Transformer	65-0100	49	Vibrator Choke	32-2812
10	R. F. Transformer	65-0009	50	Choke	32-2657
11	Resistor (40,000 ohms)	33-339134	51	Condenser (250 mmfd.)	30-1032
12	Sensitivity Control	33-520444	52	Vibrator	41-3170
13	Condenser (.05 mfd.)	30-4444	53	Resistor (200 ohms)	33-120337
14	Condenser (.09,000 ohms)	33-339337	54	Condenser (.5 mfd.)	30-4565
15	Condenser (250 mmfd.)	30-1038	55	Power Transformer	65-0016
16	Resistor (25,000 ohms)	33-325337	56	Condenser (7,500 mmfd.)	30-4567
17	Padder (Pri. 1st I. F. Trans.)	65-0002	57	Filter Condenser (4-8 mfd.)	30-2295
18	Resistor (Sec. 2nd I. F. Trans.)	33-190438	58	Filter Choke (325 ohms)	32-7910
19	Condenser (.05 mfd.)	30-4569	59	Oscillator Transformer	65-0052
20	Resistor (1,000,000 ohms)	33-510337	60	Silver Cap Condenser	61-0031
21	Second I. F. Transformer	65-0003	61	Oscillator Transformer	65-0051
22	Resistor (600 ohms)	33-160438	62	Oscillator Transformer	65-0050
23	Resistor (25,000 ohms)	33-325337	63	Oscillator Transformer	65-0049
24	Resistor (45,000 ohms)	33-260337	64	Choke	32-1644
25	Volume Control (1,000,000 ohms)	67-0012-1	65	Condenser (250 mmfd.)	30-1032
26	On-Off Switch	67-0012-1	66	Push Button Switch	complete
27	Condenser (.01 mfd.)	30-4179	67	Thermal Coupling Condenser	61-0011
28	Resistor (330,000 ohms)	33-433337	68	Tuning Condenser	63-0012
29	Resistor (210,000 ohms)	33-424337	69	Silver Cap Condenser	61-0003
30	Condenser (250 mmfd.)	30-1032	70	Wafer Switch	77-0185
31	Condenser (6,000 mmfd.)	30-4504	71	Antenna Padder Assembly	77-0035
32	Condenser (.01 mfd.)	30-4501	72	On-Off Switch and	67-0012-1
33	Resistor (490,000 ohms)	33-419337	73	Volume Control	67-0012-1
34	Condenser (250 mmfd.)	30-1032	74	Low Frequency Padder	63-0017
35	Resistor (210,000 ohms)	33-424337	75	First Padder (on Tun. Cond.)	77-0120
36	Condenser (6,000 mmfd.)	30-4024	76	Impulse Motor	77-0120
37	Condenser (25,000 ohms)	65-0053	77	Resistor (25,000 ohms)	33-325337
38	Resistor (1,500 ohms)	33-215337	78	Second Padder (on Tun. Cond.)	77-0120
39	Choke	32-1374	79	Dial Assembly	85-0020
40	Tone Control Switch	complete			
41	Condenser (250 mmfd.)	30-1032			

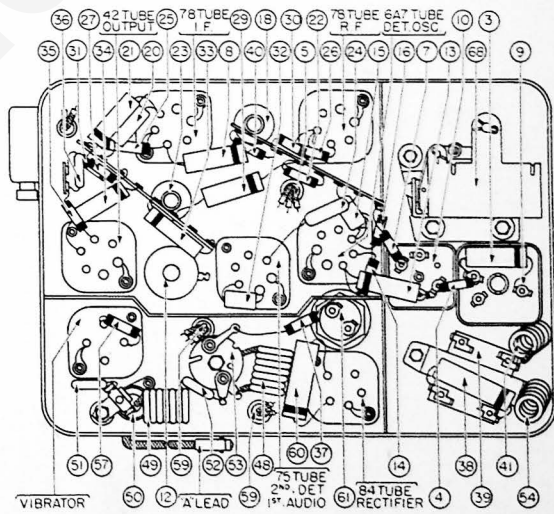

No.	Description	Part No.	No.	Description	Part No.
32	Tone Control and Automatic Drum	55-0197	57	Flexible Shaft	37-0467
33	Automatic Push Button (Commander)	53-0100	58	Call Letter Kit	81-0052
34	Automatic Push Button (President)	55-0172	59	Condenser and Lug Assy.	30-1087
35	Tuning and Volume Knob (President)	27-4689	60	Interference Condenser	30-4007
36	Tuning and Volume Knob (Commander)	55-0102	61	Distributor Resistor	32-2250
37			62	"T" Bolt (Rec. Mtg.)	28-6161
38			63	Nut (Rec. Mtg.)	WS18
39			64	Speaker Cable	41-3281