



MODEL AR-9

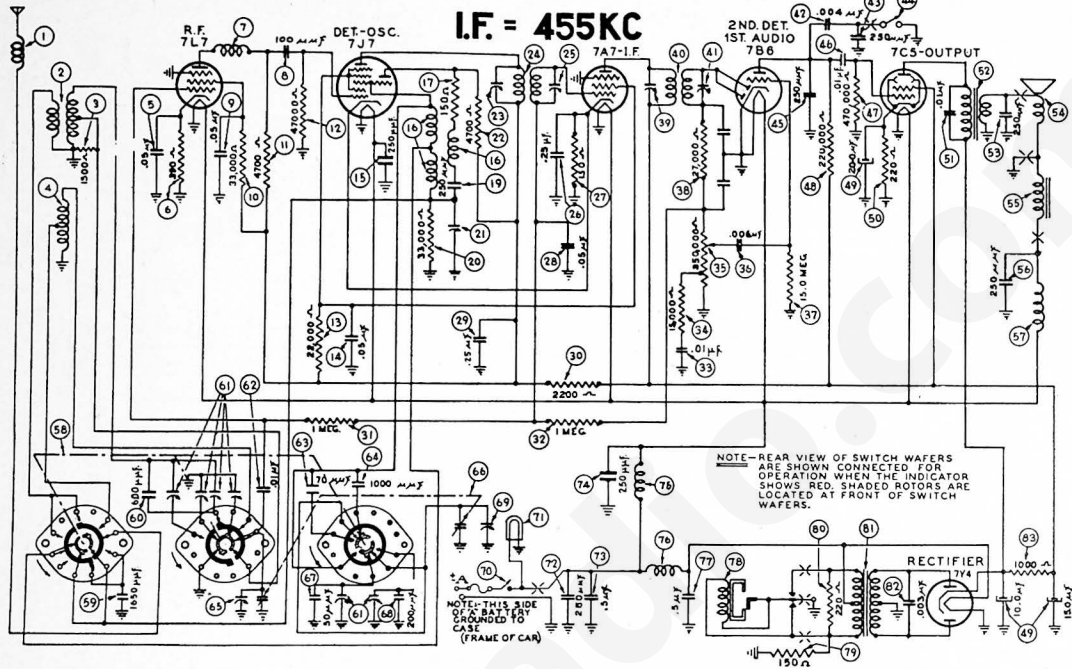

Aligning Procedure will be found on page 166.

PARTS LIST - AR-9

No.	Description	Part No.	No.	Description	Part No.
1	Antenna Choke	65-0340	67	Tone Control Switch	85-0111
2	Short Wave Antenna Transformer	65-0341	68	Condenser (250 Mmf.d.)	61-0033
3	Resistor (1500 ohms)	33-215334	69	Condenser (.01 Mfd.)	61-0109
4	Broadcast Antenna Transformer	65-0085	70	Resistor (470,000 ohms)	33-447154
5	Condenser (.05 Mfd.)	61-0101	71	Resistor (220,000 ohms)	33-422334
6	Resistor (390 ohms)	33-139336	72	Filter Condenser (10-15-20 Mfd.)	61-0089
7	Choke	65-0337	73	Resistor (220 ohms)	33-122438
8	Condenser (100 Mmf.d.)	61-0065	74	Condenser (.01 Mfd.)	61-0124
9	Condenser (.05 Mfd.)	61-0111	75	Output Transformer	65-0317
10	Resistor (33,000 ohms)	33-333334	76	Condenser (250 Mmf.d.)	61-0033
11	Resistor (4700 ohms)	33-247334	77	Replacement Cone (For 73-0042-2 Speaker)	91-0086
12	Resistor (47,000 ohms)	33-347334	78	Replacement Cone (For 73-0042-3 Speaker)	91-0126
13	Resistor (22,000 ohms)	33-322434	79	Replacement Cone (For 73-0047-2 Speaker)	91-0086
14	Condenser (.03 Mfd.)	61-0101	80	Replacement Cone (For 73-0047-3 Speaker)	91-0126
15	Condenser (250 Mmf.d.)	61-0033	81	Field Coil (Not Replaceable)	
16	Oscillator Transformer	65-0339	82	Condenser (250 Mmf.d.)	61-0033
17	Resistor (150 ohms)	33-115334	83	Choke	22-1014
18	Condenser (250 Mmf.d.)	61-0033	84	Wafers	77-0567
19	Resistor (33,000 ohms)	33-333334	85	Silver Mica Condenser (1050 Mmf.d.)	5877
20	Condenser (.03 Mfd.)	61-0101	86	Silver Mica Condenser (600 Mmf.d.)	60-160314
21	Resistor (4,700 ohms)	33-247334	87	Padder Assembly	77-0569
22	Padder (Pri. 1st I. F. Trans.)	65-0338	88	Padder (.01 Mfd.)	61-0110
23	First I. F. Transformer	65-0338	89	Condenser (70 Mmf.d.)	61-0146
24	Padder (Sec. 1st I. F. Trans.)	65-0337	90	Condenser (1000 Mmf.d.)	61-0079
25	Condenser (.25 Mfd.)	61-0112	91	Antenna Padder (on Tun. Cond.)	
26	Resistor (150 ohms)	33-115334	92	Tuning Condenser	63-0050
27	Resistor (.05 Mfd.)	61-0111	93	Condenser (50 Mmf.d.)	61-0140
28	Condenser (.25 Mfd.)	61-0125	94	Condenser (200 Mmf.d.)	61-0141
29	Resistor (2200 ohms)	33-222434	95	Oscillator Padder (on Tun. Cond.)	
30	Resistor (1,000,000 ohms)	33-510154	96	On-Off Switch	83-0112
31	Resistor	33-510154	97	Pilot Lamp	24-2029
32	Condenser (.01 Mfd.)	61-0114	98	Condenser (250 Mmf.d.)	61-0033
33	Resistor (15,000 ohms)	33-315154	99	Condenser (.5 Mfd.)	61-0137
34	Volume Control (1500,000 ohms)	67-0032-2	100	Condenser (250 Mmf.d.)	61-0033
35	Condenser (6000 Mmf.d.)	61-0103	101	"A" Choke	32-1601
36	Resistor	33-615154	102	Vibrator Choke	65-0975
37	Resistor (27,000 ohms)	33-327154	103	Condenser (.5 Mfd.)	61-0137
38	Padder (Pri. 2nd I. F. Trans.)	65-0320	104	Vibrator	83-0225
39	Second I. F. Transformer	65-0320	105	Resistor (150 ohms)	33-115334
40	Padder (Sec. 2nd I. F. Trans.)	61-0129	106	Resistor (220 ohms)	33-122334
41	Condenser (4000 Mmf.d.)	61-0129	107	Power Transformer	65-0318
42	Condenser (250 Mmf.d.)	61-0033	108	Condenser (3000 Mmf.d.)	61-0115
			109	Resistor (1000 ohms)	33-210434

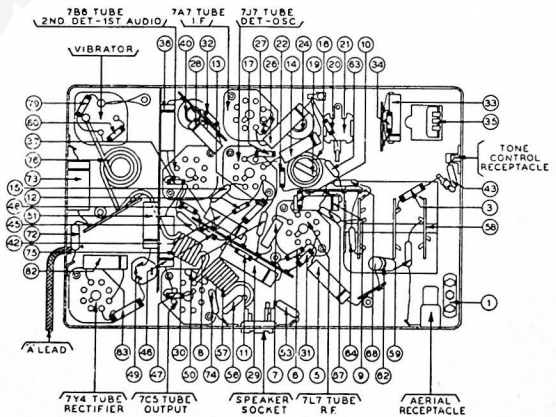

No.	Description	Part No.	No.	Description	Part No.
110	Housing	77-0533FC45	116	Station Indicator	77-0572
111	Speaker	55-0443	117	Hook Bolts (Radio Mtg.)	57-1340FA3
112	Lokalt Socket	55-0575	118	Not (Radio Mtg.)	W85FA3
113	Vibrator Socket	27-6044	119	Control Mtg. Bracket	57-1300FC48
114	Tube Side Cover	318-2034	120	Control Mtg. Bracket	57-1301FC45
115	Wiring Side Cover	57-1345FC45	121	Cable Clamp	57-1429
	Control Unit	65-0121	122	Upper Aerial Stanchion Kit	45-1438
	Drive Cord	55-0935	123	Lower Aerial Stanchion Kit	45-1437
	Tun. & Vol. Knob	55-0936	124	Aerial Rod (9/16")	57-1247
	Volume Shaft	57-1384	125	Aerial Lead	95-0149
	Tuning Shaft	57-1385	126	All Aerial parts used in Part No. 91-0144 Cowl Aerial	
	Push Button Shaft	55-0993			
	Pointer	57-1386			
		57-1403-PA3			