

Admiral

Model: 6A1, Issue B

Chassis:

Year: Pre 1948

Power:

Circuit:

IF:

Tubes:

Bands:

Resources

Riders Volume 15 - ADMIRAL 15-12

Riders Volume 15 - ADMIRAL 15-15

MODEL 5B1
MODEL 5B1A
MODEL 6A1, Issue B

ADMIRAL CORPORATION

MODEL 6A1 - ISSUÉ B


DIAL DRUM POSITION MODEL 6A1 - ISSUÉ B
If the dial drum position is incorrect, it should be carefully repositioned to insure correct tuning. The drum will be properly positioned if the center of the drum is in a straight line parallel to the dial cable hole in the dial cable hole should be on the left side (looking at front) of the chassis.

ALIGNMENT PROCEDURE

1. Be sure Radio Receiver and Signal Generator are thoroughly warmed up before starting alignment procedure.
2. Check setting of Pointer Extremes and note correct 600 K.C. and 1400 K.C. positions on Dial Background. (See Dial Diagram)
3. Connect Output Meter across Voice Coil.
4. Turn Receiver Volume Control full on.
5. Use lowest Output setting of Signal Generator capable of producing adequate Output Meter indication and then proceed in the following sequence.
6. Repeat adjustments to insure final overall maximum results.

MODEL 5B1A ALIGNMENT PROCEDURE MODEL 5B1

1. Be sure Radio Receiver and Signal Generator are thoroughly warmed up before starting alignment procedure.
2. Check setting of Pointer Extremes and note correct 600 K.C. and 1400 K.C. positions on Dial Background. (See Dial Diagram)
3. Connect Output Meter across Voice Coil.
4. Turn Receiver Volume Control full on.
5. Use lowest Output setting of Signal Generator capable of producing adequate Output Meter indication and then proceed in the following sequence.
6. Repeat adjustments to insure final overall maximum results.




BACK OF CHASSIS

Connect Signal Generator To—	Dummy Antenna Between Radio and Generator	Set Generator Frequency To—	Adjust Following Trimmers	Type of Adjustment
Control Grid	250 mfd. Mica Condenser	485 KC.	C-D 2nd I. F. E	Adjust to maximum Output
External Antenna Wire on Loop	250 mfd. Mica Condenser	1600 KC.	A-B 1st I. F.	Adjust to maximum Output
External Antenna Wire on Loop	250 mfd. Mica Condenser	1400 KC.	E—Osc.	Adjust to maximum Output
Loop Winding (at place where pickup lead close to loop of set to obtain adequate signal).	No actual connection between set and generator.	1400 KC.	F—Ant. (See Note)	Adjust to maximum Output

NOTE: Antenna trimmer "F" must be aligned after chassis and loop are mounted in the cabinet. This adjustment can be made by lifting up the top cover and removing the plug button which is directly above trimmer "F".

R. FLUG POSITION
If the tuned coil slug needs replacing or re-positioning, the slug should be removed from the top of the coil with the threaded slug half-way through the bearing note that the top of the slug is flush with the top of coil form. Then re-tighten.

TOP VIEW



BACK OF CHASSIS

Connect Signal Generator To—	Dummy Antenna Between Radio and Generator	Set Generator Frequency To—	Adjust Following Trimmers	Type of Adjustment
Control Grid	250 mfd. Mica Condenser	485 KC.	A and B—2nd I. F. C and D—1st I. F.	Adjust to maximum Output
External Antenna Wire on Loop	250 mfd. Mica Condenser	1600 KC.	E—Osc.	Adjust to maximum Output
External Antenna Wire on Loop	250 mfd. Mica Condenser	1400 KC.	F—R. F. (Iron Core)	See Note Below
Loop Winding (at place where pickup lead close to loop of set to obtain adequate signal).	No actual connection between set and generator.	1400 KC.	G—Ant.	Adjust to maximum Output

NOTE: Adjustment "F" is the threaded stud at the end of the slug wire. Screw stud up or down in the bracket for maximum output. Alignment is correct if the output is reduced when the position of the slug wire is changed slightly in either direction (up or down).


MODEL 5B1 - PHONO REPLACEMENT PARTS

Part No.	Symbol	Description	Part No.	Description
4411-12	C12	.05 mfd. 400 V.	4419-11	Capacitor, 100 pfd. 500 V.
4411-13	C13	.05 mfd. 400 V.	4419-12	Capacitor, 100 pfd. 500 V.
4411-14	C14	.05 mfd. 400 V.	4419-13	Capacitor, 100 pfd. 500 V.
4411-15	C15	.05 mfd. 400 V.	4419-14	Capacitor, 100 pfd. 500 V.
4411-16	C16	.05 mfd. 400 V.	4419-15	Capacitor, 100 pfd. 500 V.
4411-17	C17	.05 mfd. 400 V.	4419-16	Capacitor, 100 pfd. 500 V.
4411-18	C18	.05 mfd. 400 V.	4419-17	Capacitor, 100 pfd. 500 V.
4411-19	C19	.05 mfd. 400 V.	4419-18	Capacitor, 100 pfd. 500 V.
4411-20	C20	.05 mfd. 400 V.	4419-19	Capacitor, 100 pfd. 500 V.
4411-21	C21	.05 mfd. 400 V.	4419-20	Capacitor, 100 pfd. 500 V.
4411-22	C22	.05 mfd. 400 V.	4419-21	Capacitor, 100 pfd. 500 V.
4411-23	C23	.05 mfd. 400 V.	4419-22	Capacitor, 100 pfd. 500 V.
4411-24	C24	.05 mfd. 400 V.	4419-23	Capacitor, 100 pfd. 500 V.
4411-25	C25	.05 mfd. 400 V.	4419-24	Capacitor, 100 pfd. 500 V.
4411-26	C26	.05 mfd. 400 V.	4419-25	Capacitor, 100 pfd. 500 V.
4411-27	C27	.05 mfd. 400 V.	4419-26	Capacitor, 100 pfd. 500 V.
4411-28	C28	.05 mfd. 400 V.	4419-27	Capacitor, 100 pfd. 500 V.
4411-29	C29	.05 mfd. 400 V.	4419-28	Capacitor, 100 pfd. 500 V.
4411-30	C30	.05 mfd. 400 V.	4419-29	Capacitor, 100 pfd. 500 V.
4411-31	C31	.05 mfd. 400 V.	4419-30	Capacitor, 100 pfd. 500 V.
4411-32	C32	.05 mfd. 400 V.	4419-31	Capacitor, 100 pfd. 500 V.
4411-33	C33	.05 mfd. 400 V.	4419-32	Capacitor, 100 pfd. 500 V.
4411-34	C34	.05 mfd. 400 V.	4419-33	Capacitor, 100 pfd. 500 V.
4411-35	C35	.05 mfd. 400 V.	4419-34	Capacitor, 100 pfd. 500 V.
4411-36	C36	.05 mfd. 400 V.	4419-35	Capacitor, 100 pfd. 500 V.
4411-37	C37	.05 mfd. 400 V.	4419-36	Capacitor, 100 pfd. 500 V.
4411-38	C38	.05 mfd. 400 V.	4419-37	Capacitor, 100 pfd. 500 V.
4411-39	C39	.05 mfd. 400 V.	4419-38	Capacitor, 100 pfd. 500 V.
4411-40	C40	.05 mfd. 400 V.	4419-39	Capacitor, 100 pfd. 500 V.
4411-41	C41	.05 mfd. 400 V.	4419-40	Capacitor, 100 pfd. 500 V.
4411-42	C42	.05 mfd. 400 V.	4419-41	Capacitor, 100 pfd. 500 V.
4411-43	C43	.05 mfd. 400 V.	4419-42	Capacitor, 100 pfd. 500 V.
4411-44	C44	.05 mfd. 400 V.	4419-43	Capacitor, 100 pfd. 500 V.
4411-45	C45	.05 mfd. 400 V.	4419-44	Capacitor, 100 pfd. 500 V.
4411-46	C46	.05 mfd. 400 V.	4419-45	Capacitor, 100 pfd. 500 V.
4411-47	C47	.05 mfd. 400 V.	4419-46	Capacitor, 100 pfd. 500 V.
4411-48	C48	.05 mfd. 400 V.	4419-47	Capacitor, 100 pfd. 500 V.
4411-49	C49	.05 mfd. 400 V.	4419-48	Capacitor, 100 pfd. 500 V.
4411-50	C50	.05 mfd. 400 V.	4419-49	Capacitor, 100 pfd. 500 V.
4411-51	C51	.05 mfd. 400 V.	4419-50	Capacitor, 100 pfd. 500 V.
4411-52	C52	.05 mfd. 400 V.	4419-51	Capacitor, 100 pfd. 500 V.
4411-53	C53	.05 mfd. 400 V.	4419-52	Capacitor, 100 pfd. 500 V.
4411-54	C54	.05 mfd. 400 V.	4419-53	Capacitor, 100 pfd. 500 V.
4411-55	C55	.05 mfd. 400 V.	4419-54	Capacitor, 100 pfd. 500 V.
4411-56	C56	.05 mfd. 400 V.	4419-55	Capacitor, 100 pfd. 500 V.
4411-57	C57	.05 mfd. 400 V.	4419-56	Capacitor, 100 pfd. 500 V.
4411-58	C58	.05 mfd. 400 V.	4419-57	Capacitor, 100 pfd. 500 V.
4411-59	C59	.05 mfd. 400 V.	4419-58	Capacitor, 100 pfd. 500 V.
4411-60	C60	.05 mfd. 400 V.	4419-59	Capacitor, 100 pfd. 500 V.
4411-61	C61	.05 mfd. 400 V.	4419-60	Capacitor, 100 pfd. 500 V.
4411-62	C62	.05 mfd. 400 V.	4419-61	Capacitor, 100 pfd. 500 V.
4411-63	C63	.05 mfd. 400 V.	4419-62	Capacitor, 100 pfd. 500 V.
4411-64	C64	.05 mfd. 400 V.	4419-63	Capacitor, 100 pfd. 500 V.
4411-65	C65	.05 mfd. 400 V.	4419-64	Capacitor, 100 pfd. 500 V.
4411-66	C66	.05 mfd. 400 V.	4419-65	Capacitor, 100 pfd. 500 V.
4411-67	C67	.05 mfd. 400 V.	4419-66	Capacitor, 100 pfd. 500 V.
4411-68	C68	.05 mfd. 400 V.	4419-67	Capacitor, 100 pfd. 500 V.
4411-69	C69	.05 mfd. 400 V.	4419-68	Capacitor, 100 pfd. 500 V.
4411-70	C70	.05 mfd. 400 V.	4419-69	Capacitor, 100 pfd. 500 V.
4411-71	C71	.05 mfd. 400 V.	4419-70	Capacitor, 100 pfd. 500 V.
4411-72	C72	.05 mfd. 400 V.	4419-71	Capacitor, 100 pfd. 500 V.
4411-73	C73	.05 mfd. 400 V.	4419-72	Capacitor, 100 pfd. 500 V.
4411-74	C74	.05 mfd. 400 V.	4419-73	Capacitor, 100 pfd. 500 V.
4411-75	C75	.05 mfd. 400 V.	4419-74	Capacitor, 100 pfd. 500 V.
4411-76	C76	.05 mfd. 400 V.	4419-75	Capacitor, 100 pfd. 500 V.
4411-77	C77	.05 mfd. 400 V.	4419-76	Capacitor, 100 pfd. 500 V.
4411-78	C78	.05 mfd. 400 V.	4419-77	Capacitor, 100 pfd. 500 V.
4411-79	C79	.05 mfd. 400 V.	4419-78	Capacitor, 100 pfd. 500 V.
4411-80	C80	.05 mfd. 400 V.	4419-79	Capacitor, 100 pfd. 500 V.
4411-81	C81	.05 mfd. 400 V.	4419-80	Capacitor, 100 pfd. 500 V.
4411-82	C82	.05 mfd. 400 V.	4419-81	Capacitor, 100 pfd. 500 V.
4411-83	C83	.05 mfd. 400 V.	4419-82	Capacitor, 100 pfd. 500 V.
4411-84	C84	.05 mfd. 400 V.	4419-83	Capacitor, 100 pfd. 500 V.
4411-85	C85	.05 mfd. 400 V.	4419-84	Capacitor, 100 pfd. 500 V.
4411-86	C86	.05 mfd. 400 V.	4419-85	Capacitor, 100 pfd. 500 V.
4411-87	C87	.05 mfd. 400 V.	4419-86	Capacitor, 100 pfd. 500 V.
4411-88	C88	.05 mfd. 400 V.	4419-87	Capacitor, 100 pfd. 500 V.
4411-89	C89	.05 mfd. 400 V.	4419-88	Capacitor, 100 pfd. 500 V.
4411-90	C90	.05 mfd. 400 V.	4419-89	Capacitor, 100 pfd. 500 V.
4411-91	C91	.05 mfd. 400 V.	4419-90	Capacitor, 100 pfd. 500 V.
4411-92	C92	.05 mfd. 400 V.	4419-91	Capacitor, 100 pfd. 500 V.
4411-93	C93	.05 mfd. 400 V.	4419-92	Capacitor, 100 pfd. 500 V.
4411-94	C94	.05 mfd. 400 V.	4419-93	Capacitor, 100 pfd. 500 V.
4411-95	C95	.05 mfd. 400 V.	4419-94	Capacitor, 100 pfd. 500 V.
4411-96	C96	.05 mfd. 400 V.	4419-95	Capacitor, 100 pfd. 500 V.
4411-97	C97	.05 mfd. 400 V.	4419-96	Capacitor, 100 pfd. 500 V.
4411-98	C98	.05 mfd. 400 V.	4419-97	Capacitor, 100 pfd. 500 V.
4411-99	C99	.05 mfd. 400 V.	4419-98	Capacitor, 100 pfd. 500 V.
4411-100	C100	.05 mfd. 400 V.	4419-99	Capacitor, 100 pfd. 500 V.

MODEL 5B1 - NON-PHONO REPLACEMENT PARTS


Part No.	Symbol	Description	Part No.	Description
4420-1	R1	500 ohm 500 V.	4420-1	Resistor, 500 ohm 500 V.
4420-2	R2	100 ohm 500 V.	4420-2	Resistor, 100 ohm 500 V.
4420-3	R3	50 ohm 500 V.	4420-3	Resistor, 50 ohm 500 V.
4420-4	R4	25 ohm 500 V.	4420-4	Resistor, 25 ohm 500 V.
4420-5	R5	10 ohm 500 V.	4420-5	Resistor, 10 ohm 500 V.
4420-6	R6	5 ohm 500 V.	4420-6	Resistor, 5 ohm 500 V.
4420-7	R7	2.5 ohm 500 V.	4420-7	Resistor, 2.5 ohm 500 V.
4420-8	R8	1.25 ohm 500 V.	4420-8	Resistor, 1.25 ohm 500 V.
4420-9	R9	.625 ohm 500 V.	4420-9	Resistor, .625 ohm 500 V.
4420-10	R10	.3125 ohm 500 V.	4420-10	Resistor, .3125 ohm 500 V.
4420-11	R11	.15625 ohm 500 V.	4420-11	Resistor, .15625 ohm 500 V.
4420-12	R12	.078125 ohm 500 V.	4420-12	Resistor, .078125 ohm 500 V.
4420-13	R13	.0390625 ohm 500 V.	4420-13	Resistor, .0390625 ohm 500 V.
4420-14	R14	.01953125 ohm 500 V.	4420-14	Resistor, .01953125 ohm 500 V.
4420-15	R15	.009765625 ohm 500 V.	4420-15	Resistor, .009765625 ohm 500 V.
4420-16	R16	.0048828125 ohm 500 V.	4420-16	Resistor, .0048828125 ohm 500 V.
4420-17	R17	.00244140625 ohm 500 V.	4420-17	Resistor, .00244140625 ohm 500 V.
4420-18	R18	.001220703125 ohm 500 V.	4420-18	Resistor, .001220703125 ohm 500 V.
4420-19	R19	.0006103515625 ohm 500 V.	4420-19	Resistor, .0006103515625 ohm 500 V.
4420-20	R20	.00030517578125 ohm 500 V.	4420-20	Resistor, .00030517578125 ohm 500 V.
4420-21	R21	.000152587890625 ohm 500 V.	4420-21	Resistor, .000152587890625 ohm 500 V.
4420-22	R22	.0000762939453125 ohm 500 V.	4420-22	Resistor, .0000762939453125 ohm 500 V.
4420-23	R23	.00003814697265625 ohm 500 V.	4420-23	Resistor, .00003814697265625 ohm 500 V.
4420-24	R24	.000019073486328125 ohm 500 V.	4420-24	Resistor, .000019073486328125 ohm 500 V.
4420-25	R25	.0000095367431640625 ohm 500 V.	4420-25	Resistor, .0000095367431640625 ohm 500 V.
4420-26	R26	.00000476837158203125 ohm 500 V.	4420-26	Resistor, .00000476837158203125 ohm 500 V.
4420-27	R27	.000002384185791015625 ohm 500 V.	4420-27	Resistor, .000002384185791015625 ohm 500 V.
4420-28	R28	.0000011920928955078125 ohm 500 V.	4420-28	Resistor, .0000011920928955078125 ohm 500 V.
4420-29	R29	.00000059604644775390625 ohm 500 V.	4420-29	Resistor, .00000059604644775390625 ohm 500 V.
4420-30	R30	.000000298023223876953125 ohm 500 V.	4420-30	Resistor, .000000298023223876953125 ohm 500 V.
4420-31	R31	.0000001490116119384765625 ohm 500 V.	4420-31	Resistor, .0000001490116119384765625 ohm 500 V.
4420-32				

ADMIRAL CORPORATION

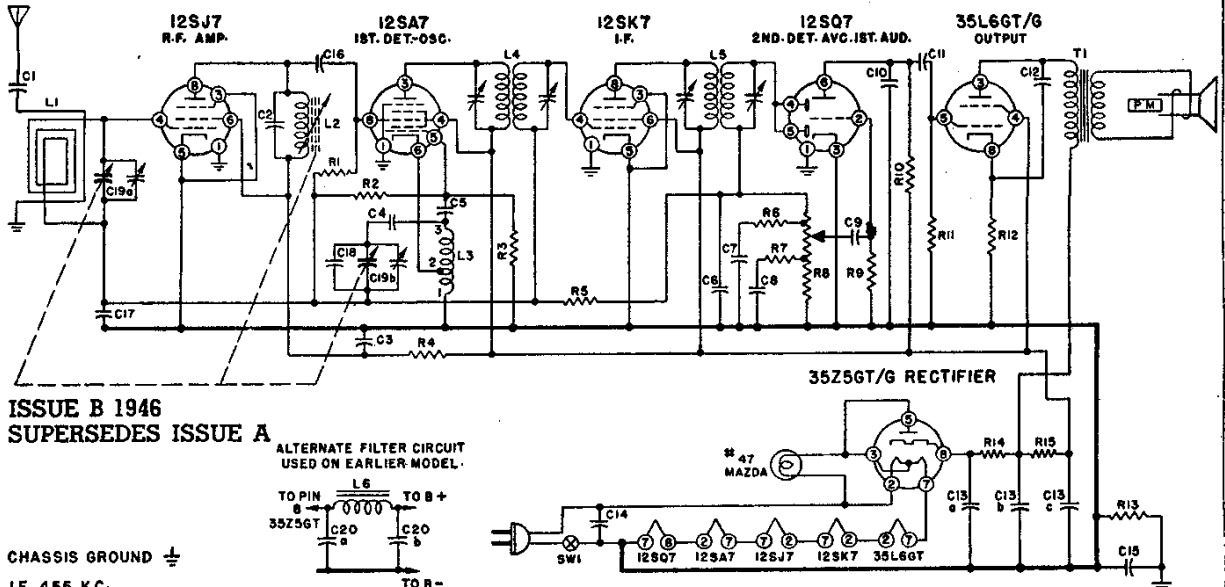

ISSUE B 1946
SUPERSEDES ISSUE A

ALTERNATE FILTER CIRCUIT
USED ON EARLIER MODEL.



CHASSIS GROUND ⊥
I.F. 455 K.C.

NOTE: 1. In later production R14 and C13a are disconnected from pin #8 of the 35Z5 and a 33-ohm 1W resistor (R16) is connected from pin #8 to the junction of R14 and C13a. 2. The jumper between pins 4 and 5 on the 12SQ7 is removed and one pin is connected to the secondary of the second I.F. (L5) and the other pin is connected directly to the junction point of R5 and the secondary of the 1st I.F. (L4).


CONDENSERS

Symbol	Capacity	Type
C-1.....	.005 mfd600 V.
C-2.....	.785. mmfdMica
C-3.....	.05 mfd400 V.
C-4.....	.02 mfd400 V.
C-5.....	50. mmfdMica
C-6.....	.250. mmfdMica
C-7.....	.01 mfd400 V.
C-8.....	.01 mfd400 V.
C-9.....	.01 mfd400 V.
C-10.....	500. mmfdMica
C-11.....	.01 mfd400 V.
C-12.....	.02 mfd400 V.
C-13a.....	30. mfd	Elect.....150 V.
C-13b.....	30. mfd	Elect.....150 V.
C-13c.....	20. mfd	Elect.....150 V.
C-14.....	.05 mfd400 V.
C-15.....	.2 mfd400 V.
C-16.....	.250. mmfdMica
C-17.....	.1 mfd200 V.
C-18.....	20. mmfdMica
C-19a.....	420. mmfd	(max.)..Var.
C-19b.....	180. mmfd	(max.)..Var.
C-20a.....	30. mfd	Elect.....150 V.
C-20b.....	50. mfd	Elect.....150 V.

RESISTORS


Symbol	Resistance	Type
R-1.....	10,000 ohmsC1/2W
R-2.....	10 meg ohmC1/2W
R-3.....	22,000 ohmsC1/2W
R-4.....	100 ohmsC1/2W
R-5.....	1 meg ohmC1/2W
R-6.....	47,000 ohmsC1/2W
R-7.....	27,000 ohmsC1/2W
R-8.....	500,000 ohm	Volume Control, (Tapped at 1/3 and 2/3 of Rotation which is 100,000 ohms and 200,000 ohms from the start, due to the taper).
R-9.....	5 meg ohmC1/2W
R-10.....	270,000 ohmsC1/2W
R-11.....	470,000 ohmsC1/2W
R-12.....	150 ohmsC1/2W
R-13.....	150,000 ohmsC1/2W
R-14.....	150 ohmsC1W
R-15.....	1,000 ohmsC1W
R-16.....	33 ohmsC1W

VOLTAGE DATA:-

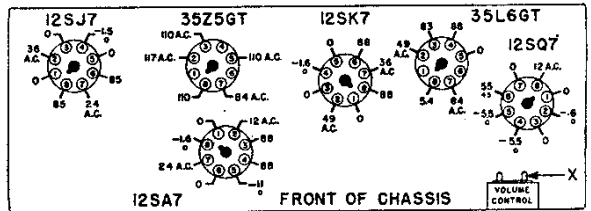

Bottom View of Chassis, Showing Voltages.

- All readings made between Tube Socket Terminals and Switch Lug on volume control (Point "X" on drawing).
- Measured on a 117 Volt A.C. line.
- Volume control full on.
- Dial tuned to low frequency end, no signal.
- Voltages indicated obtained on Vacuum Tube voltmeter.
- A second voltage reading is shown made with a 1000 ohm-per-volt meter when use of this instrument would result in appreciably lower readings.



OSCILLATOR COIL

Symbol	Description
L-1.....	(Sec. 2.3 ohms).....Loop
L-2.....	(2.5 ohms).....R. F. Coil
L-3.....Osc. Coil
L-4.....1st I. F. Trans.
L-5.....2nd I. F. Trans.
L-6.....	(325 ohms).....Choke, Filter

SPECIFICATIONS


POWER SUPPLY:-

110-120 Volts A.C. or D.C.
Frequency 50-60 cycles.
Power Consumption—30 watts.

CIRCUIT:-

Chassis 6A1 A.C.—D.C. 6 Tube Superheterodyne, with R.F. stage: Single tuning range, 540 Kc. to 1630 Kc., covering standard broadcast band; built-in AEROSCOPE loop antenna, with provision for connecting an external antenna.

POINTER SETTINGS AND DIAL CORD STRINGING

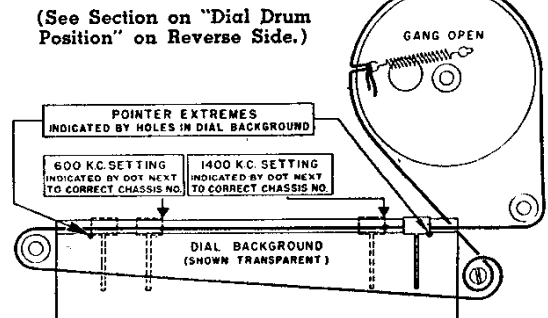

For Alignment and Parts, see P.15-12