



PHILCO MODELS 51, 51-A AND 52

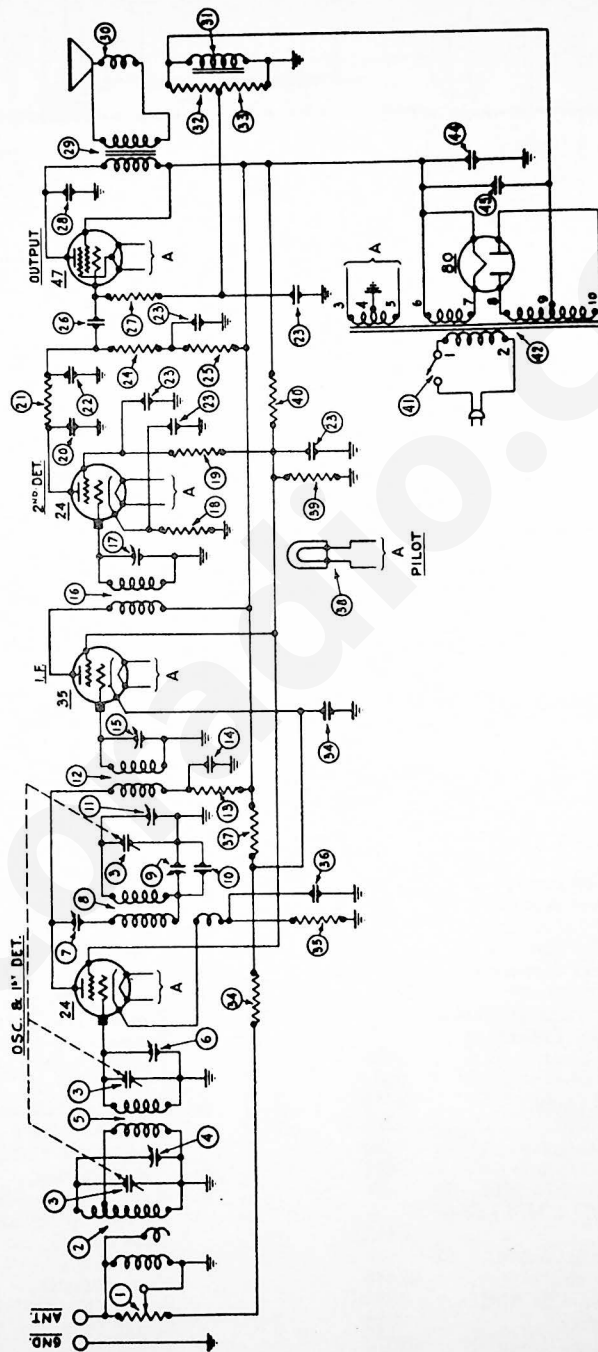

PHILCO MODELS 51, 51-A AND 52

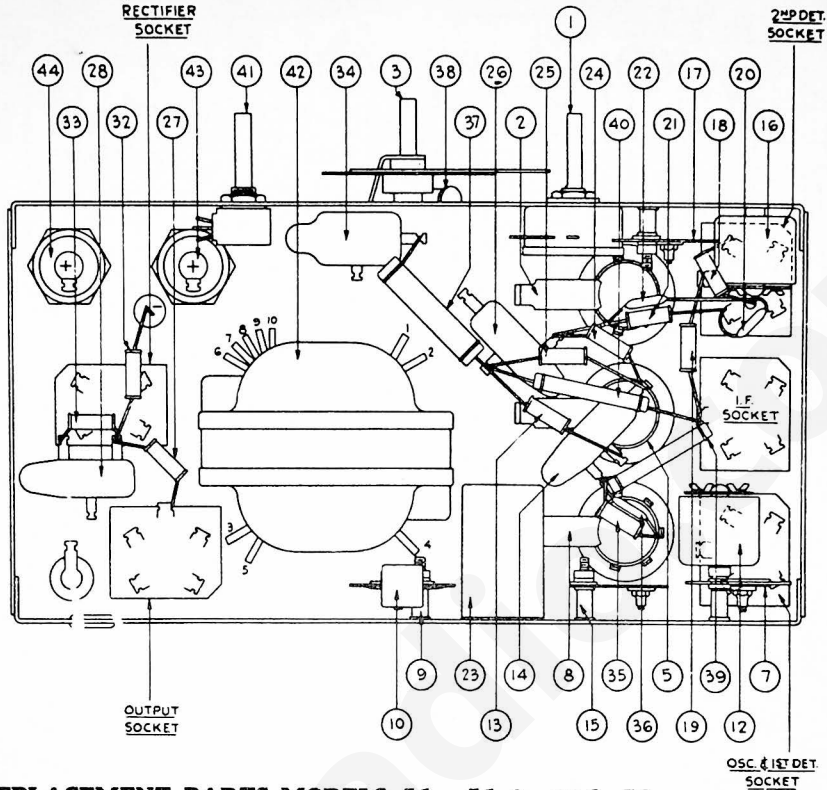

REPLACEMENT PARTS MODELS 51, 51-A and 52

No. on Figs. 1 and 2	Description	Part No.	No. on Figs. 1 and 2	Description	Part No.
①	Volume Control	5839	④	Field Coil and Pot Assembly	02942
②	Antenna Coil	03880	⑤	Resistor (490,000 ohms)	4517
③	Gang Conder ser	03809	⑥	Resistor (160,000 ohms)	5331
④	Compensating Condenser (Part of gang condenser assembly)		⑦	Resistor (250 ohms and .05 mfd.)	3615-C
⑤	First R.F. Transformer	03881	⑧	Resistor (8,000 ohms)	5838
⑥	Compensating Condenser (part of gang condenser assembly)		⑨	Condenser (710 mmf.)	5863
⑦	Compensating Condenser	04000-A	⑩	Resistor (51,000 ohms)	5868
⑧	Oscillator Coil	03882	⑪	Pilot Light	3463
⑨	Compensating Condenser	04000-F	⑫	Resistor (25,000 ohms)	3656
⑩	Condenser (710 mmf.)	5863	⑬	Resistor (32,000 ohms)	3525
⑪	Compensating Condenser (part of gang condenser assembly)		⑭	On-off Switch	5382
⑫	First I. F. Transformer	03887	⑮	Power Transformer, 50-60 cycles Power Transformer, 25-40 cycles Power Transformer, 50-60 cycles, 230 volts	5266 5267 5268
⑬	Resistor (1,000 ohms)	5837	⑯	Electrolytic Condenser (6 mfd.) 50-60 cycles	4916
⑭	By-pass Condenser (.05 mfd.)	3615-AC		Electrolytic Condenser (10 mfd.) 25-40 cycles	5142
⑮	Compensating Condenser	04000-D	⑰	Electrolytic Condenser (6 mfd.) By-pass Condenser (across power line) .01 mfd. double, Colonial Clock only	4916 3903-S
⑯	Second I.F. Transformer	03886		Clock Unit (60 cycles) Model 551	5950
⑰	Compensating Condenser	04000-D		Clock Glass	5942
⑱	Resistor (33,000 ohms)	5279		Tube Shield	04011
⑲	Resistor (99,000 ohms)	4411		Knob (Large)	03064
⑳	Condenser (250 mmf.)	5858		Knob (Small)	03437
㉑	Resistor (10,000 ohms)	4412		Grid Clip	4897
㉒	Condenser (250 mmf.)	5858		Five Prong Socket Assembly	4956
㉓	Condenser (.1, .15, .25, 2-.5) 50-60 cycles	03915		Four Prong Socket Assembly	5026
	Condenser (.2, .15, .25, 2-.5) 25-40 cycles	03945		Pilot Light Bracket Complete	03814
㉔	Resistor (490,000 ohms)	4517		Dial Complete	04031
㉕	Resistor (99,000 ohms)	4411		Bezel	5879
㉖	Condenser (.01 mfd.)	3903-N		Spring (Large)	5262
㉗	Resistor (490,000 ohms)	4517		Spring (Small)	4147
㉘	Condenser (.01 mfd.)	3903-K		Scroll (Model 551)	44613
㉙	Output Transformer	2660		Turnings (3 used) Model 551	44607
㉚	Voice Coil and Cone Assembly TYPE "S" (Large)	02887			
	TYPE "P" (Small)	02861			