



MODEL 39
(Battery Operated)

I. F.—460 K. C

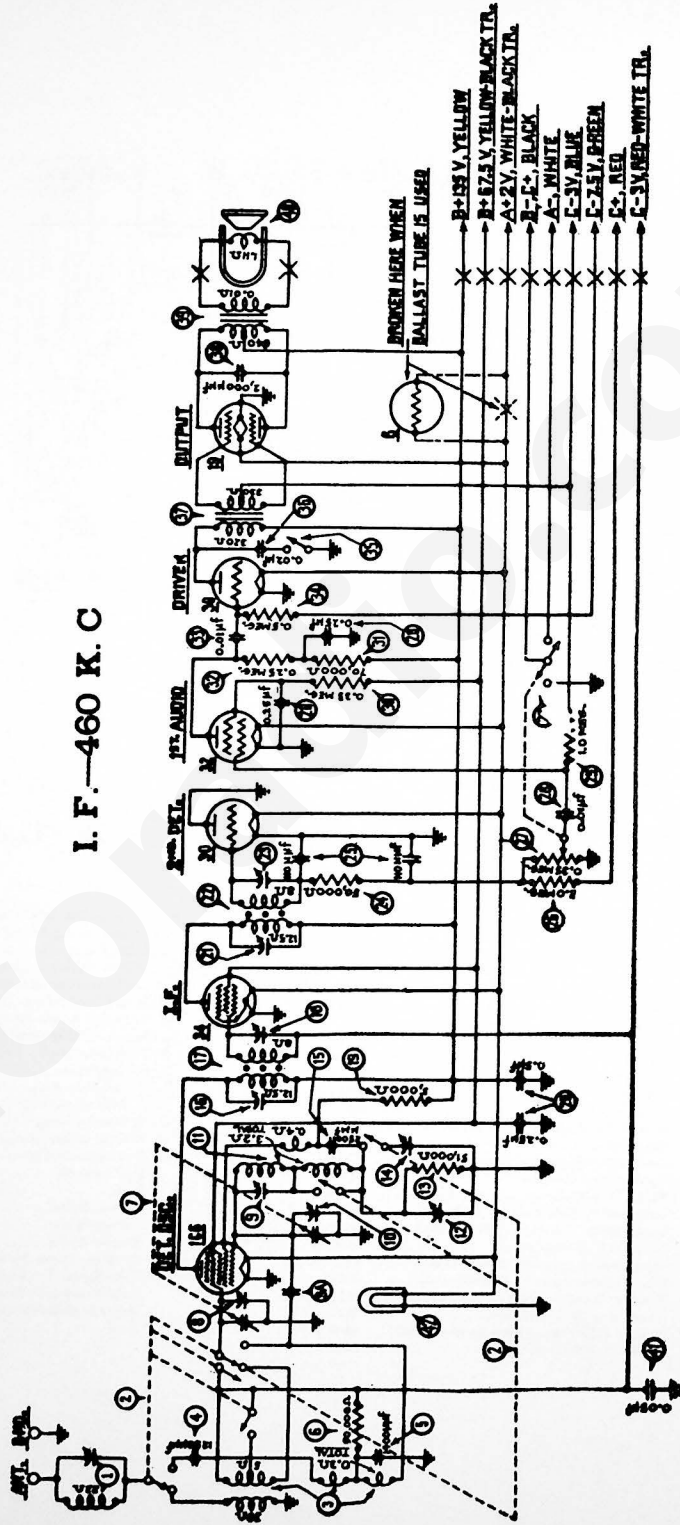

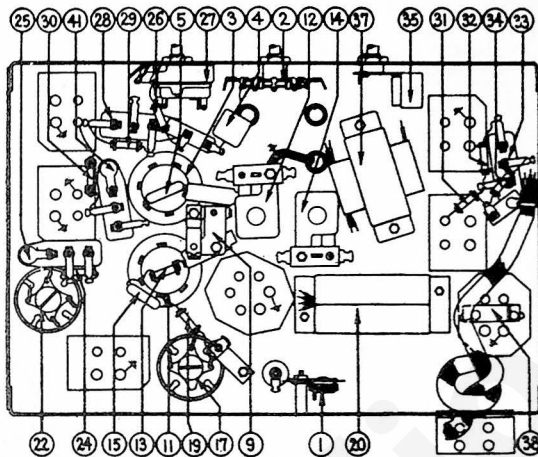

Replacement Parts—Model 39

Nos. on Fig. 3 & 4	Description	Part No.
①	Wave Trap.....	38-5904
②	Wave Band Switch.....	42-1092
③	Antenna Transformer.....	32-1548
④	Condenser (.00125 mfd. mica).....	5886
⑤	Condenser (.0014 mfd. mica).....	7007
*⑥	Resistor (50000 ohms) (Green-Brown-Orange).....	6096
⑦	Tuning Condenser Assembly.....	31-1440
*⑧	Compensating Condenser (Ant.).....	Part of ①
*⑨	Compensating Condenser (S. W. Maximum).....	04000-V
⑩	Condenser (capacity from twisted wires).....	
⑪	Compensating Condenser (Osc. H. F. Bdest).....	Part of ⑦
⑫	Oscillator Transformer.....	32-1549
⑬	Compensating Condenser (Osc. L. F. Bdest).....	04000-E
⑭	Resistor (50000 ohms) (Green-Brown-Orange).....	6096
⑮	Compensating Condenser (Short-wave Minimum).....	04000-R
⑯	Condenser (.0025 mfd. mica).....	7008
*⑰	Compensating Condenser (1st I. F. pri.).....	Part of ⑪
⑱	1st I. F. Transformer.....	32-1550
*⑲	Compensating Condenser (1st I. F. sec.).....	Part of ⑪
⑳	Resistor (5000 ohms) (Green-Black-Red).....	6096
㉑	Condenser (Metal Case, 4 sec.: .5, .25, .25, .25 mfd.).....	30-4263
*㉒	Compensating Condenser (2nd I. F. pri.).....	Part of ㉑
㉓	2nd I. F. Transformer.....	32-1551
*㉔	Compensating Condenser (2nd I. F. sec.).....	Part of ㉑
㉕	Resistor (50,000 ohms) (Green-Brown-Orange).....	6096
㉖	Condenser (.0001 mfd. twin bakelite block).....	8085-C
㉗	Resistor (2 meg.) (Red-Black-Green).....	32-1035
㉘	Volume Control & On-Off Switch.....	32-5020

*Do not show in Fig. 4.

Nos. on Fig. 3 & 4	Description	Part No.
㉙	Condenser (.01 mfd. bakelite block).....	3008-AD
㉚	Resistor (1 meg.) (Brown-Black-Green).....	32-1026
㉛	Resistor (330000 ohms) (Orange-Orange-Yellow).....	6046
㉜	Resistor (70000 ohms) (Violet-Black-Orange).....	32-1115
㉝	Resistor (.25 meg.) (Red-Yellow-Yellow).....	32-1097
㉞	Condenser (.01 mfd. bakelite block).....	3008-AD
㉟	Resistor (5 meg.) (Yellow-White-Yellow).....	6097
㊱	Tone Control (2 pt.).....	30-4261
*㊲	Condenser (in tone control).....	Part of ㊱
㊳	Audio Transformer.....	7253
㊴	Condenser (.002 mfd. tubular).....	30-4177
㊵	Output Transformer.....	32-7286
㊶	Cone & Voice Coil Assembly (XR-7 Speaker).....	26-3190
㊷	Condenser (.05 mfd. bakelite block).....	3615-BC
㊸	Pilot Lamp (dial).....	5816
㊹	Dial Assembly.....	31-1471
㊺	Tube Shield (fits over base).....	8006
㊻	Tube Shield (fits inside base).....	26-1107
㊼	Tube Socket (4-prong).....	7545
㊽	Tube Socket (6-prong).....	7547
㊾	Chassis Mounting Screw.....	W-567
㊿	Chassis Mounting Washer (30-B).....	5088
1	Chassis Mounting Washer (30-F).....	W-315A
2	Chassis Mounting Washer (rubber).....	5189
3	Knob.....	27-4088
4	Battery Cable Assembly (with plug).....	41-3118
5	Ballast Tube Jumper Wire.....	32-8081