


PADDER COMPLIMENT

FOR PHILCO MODEL 38-116XX, CODE 125

<u>TUNING RANGE SWITCH POSITION</u>	<u>SIGNAL GENERATOR AND RECEIVER DIAL</u>	<u>COMPENSATORS ADJUSTED IN ORDER</u>
1	1550 K.C.	(1), (6), (5)
1	580 K.C.	(10, Nut) Roll gang
1	1550 K.C.	(1), (6), (5)
5	18 M.C.	(4), (8), (7) Roll gang check image at 17.060
4	11 M.C.	(3)
3	7 M.C.	(9) Screw
2	4.5 M.C.	(2)
5	18 M.C.	(4), (8), (7), Roll gang check image at 17.060
5	18 M.C.	(4)

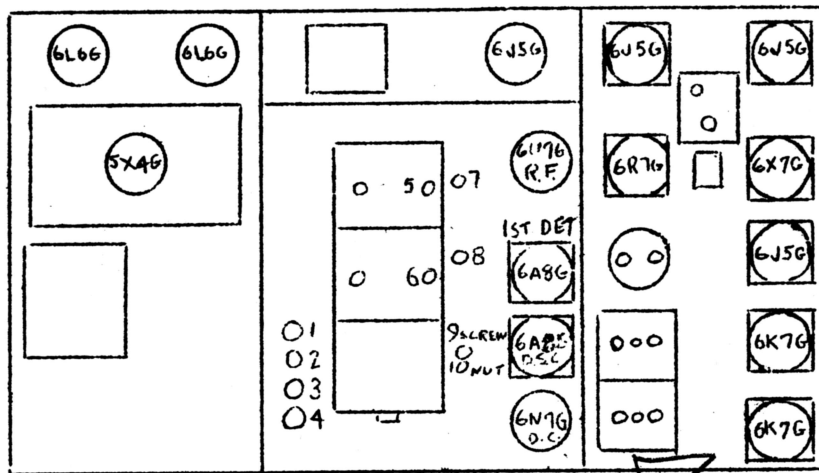

FRONT OF CHASSIS

ANT